


MICRO *connect*



MINI 4G LCM

Sales and service
www.microconnect.com.au

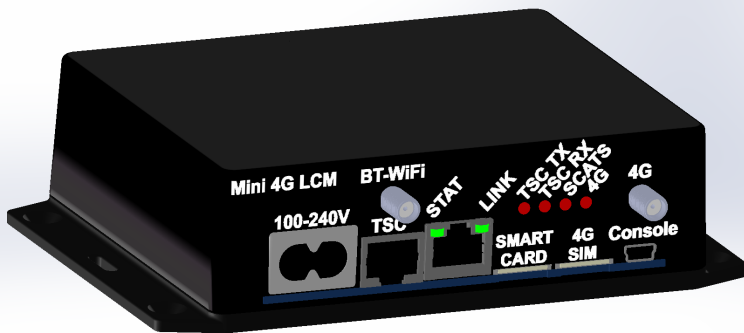

SCATS TSC
via 4G or Ethernet

Proven LCM
firmware

Low cost

Small size

Built in
100-240V AC

BT/BLE/WiFi

Smart card for
config storage

Local and remote
config and
diagnostics

Global LTE Cat M1

- 10°C to 70°C

Mini 4G LCM Specifications

Voltage	100-240V AC
Power	3W
Dimensions	39H x 147W x 95D mm (including mounting flange)
Temperature	-10°C to +70°C
Interfaces	1 x Ethernet 10/100 1 x TSC Serial (cable supplied for PSC/TSC-4) 1 x Bluetooth/WiFi 1 x Smart Card 1 x USB Console
LTE	Global Cat M1, micro SIM
SCATS	Full SCATS compliant automatic protocol
Conifg	Removable micro smart card